

# PROTECTAPEEL

PAINT • PROTECT • PEEL

## Teakguard

**Protectapeel Teakguard** is a peelable protective coating specifically designed to protect teak and teak decking from damage such as scratches, surface abrasion, dirt, spillages and staining from paint and oils for up to 6 months. To make Teakguard waterproof and to protect against long term UV exposure, apply SC1090 Topcoat which will protect for up to 12 months.

**Colour** - Brown

**Health & Safety** - The compound is non toxic and non flammable in the wet state. The dry film waste may be disposed of as low hazard. Please see separate Health & Safety Sheet.

**Application** - **By Lambswool Roller** – Apply 2 coats, allowing 1st to tack off. Apply generously to achieve a **min wet film thickness (WFT) of 350 Microns (125 Microns DFT)**

**By Spray** – Apply with airless spray gun, using a 17 thou tip size and a box coat to achieve a **min wet film thickness (WFT) of 350 Microns (125 Microns DFT)**. To avoid “feather edges”, apply masking tape before the product is applied. Paint up to and over the masking tape edge then remove tape when product is still wet to leave a defined edge.


**A minimum wet film thickness of 350 microns (125 micron dry film thickness) must be achieved, anything less may result in the product becoming difficult to remove.** Do not apply in wet or freezing conditions and protect from rainfall.

The contents of the containers should be mixed thoroughly before use.

**Repair** - If the protective coating rips, repair by lifting the ripped patch and apply a fresh coat to the underside and reseal. Alternatively, cut away the damaged area and apply a fresh coat.

**Drying Time** - Can vary, a WFT of 350 microns will be tack free between 2-6 hours depending on humidity and temperature. Force drying may be used by increasing the surface temperature to a maximum of 50°C and using moving air.

**Surfaces** - Teak & Teak Decking

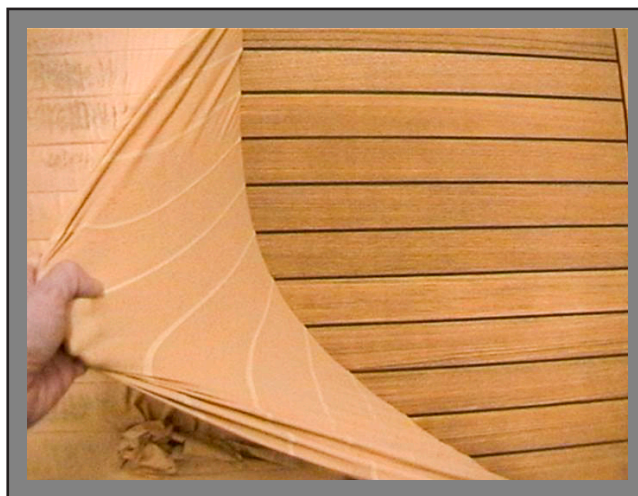

**Coverage** - One kilo/litre will cover approximately 3m<sup>2</sup> at a WFT of 350 microns.

**Removal** - The dry film can be easily removed either by hand peeling or by pressure hose. Do not remove in freezing conditions as the coating may be brittle.

**External Weather Resistance** - Teakguard is suitable for up to 6 months exposure. With the addition of SC1090 top coat Teakguard is suitable for up to 12 months exposure.

**Storage** - Shelf life 12 months. Store at temperatures between 5°C - 25°C. DO NOT ALLOW LIQUID TO FREEZE.

**Clean Down** - Clean rollers and equipment with water immediately after use.

**General Note:** It is important that this product is thoroughly evaluated under production conditions before being commercially adopted (Such an evaluation should incorporate a reference to ageing). The above recommendations are made in good faith for the guidance of users and are without liability. Any queries should be referred to our Technical Sales Department.